

# Vanguard

## Specification

### Material

This bollard has the option of being cast in LM6 Aluminium , Grey Iron or Ductile SG Iron. The lens is polycarbonate and can be either clear, frosted or opal.

### Ingress Protection

IP 44 Optical Compartment , IP 44 Gear Compartment

### Finishes

Polyester Powder Coated any BS or RAL colour or stoving acrylic paint to any colour.

### Optics

Can be fitted with the Candela Symmetrical Louvre or LED's are fitted with variety of optical lenses

### Gear

Sodium and CDMT-T	50w Max
Metal Halide	50w Max
Cosmopolis	45w Max
Compact Fluorescent	70w Max

**LED Aray** 3w - 24w

### Maintenance


Gear is mounted on a back board and accessed via the door. The lamp is accessed by removing the lid casting.

### Photo Electrical Cell


The fitting accepts miniature Photo Electrical Cells as an option

### Fixing Details


The fitting come with the option of integral root ,'J' bolts and template or Fabricated root

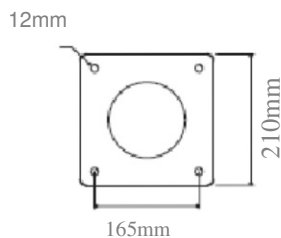


**Base Flange**  
\*suggested fixings



**Fabricated root (option)**



**J-Bolt (option)**

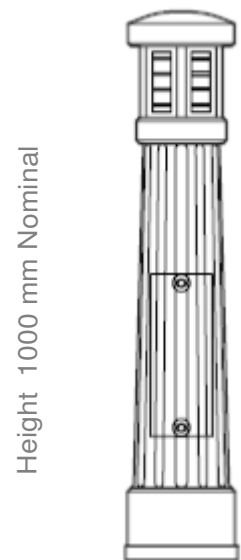

Height 1000 mm Nominal

Dia 165mm

319, Long Acre, Nechells, Birmingham, UK. B7 5JT

Tel 0121 678 6700 Fax 0121 678 6701

Email: sales@candela.co.uk Web: www.candela.co.uk

Candela Light is a trading name of Candela Traditional lighting Limited Design Right subsisting in the design of articles shown herein are the property of Candela Traditional Lighting Limited



**candela**

L I G H T