

Perth

Specification

Material

The body can be made from Aluminium, Copper or Brass and the Glazing is a double UV stable polycarbonate moulding. The stirrup featured is a galvanized steel fabrication

Ingress Protection

IP 66 Optical Compartment , IP 44 Gear Compartment

Finishes

The Aluminium body and brim are treated with a chromate and then can be Polyester Powder Coated any BS or RAL colour. Copper and Brass versions can be Polished and Lacquered or given an antique finish. They can also be left raw to age naturally.

Optics

Can be fitted with the Candela Glass Asymmetric Refractor or the Candela EV range of street optics

Gear

Sodium and CDMT-T	150w Max
CDMT	150w Max
Metal Halide	150w Max
Compact Fluorescent	70w Max
Cosmopolis	45w -140w

LED Array

24w - 60w

Fixings & Mountings

All fixings are Stainless Steel

This fitting can be Top mounted via Candela's Easy Fit or Stirrup mounted to suit our range of wall and post top brackets suitable for all size columns

Mounting is via the Candela Easy Fit

Recommended Height

3mtr - 6 mtr

Maintenance


No tooling required. Unscrew the cast finial at the top of the fitting and remove the spun canopy to gaining access to the gear and lamp. Lamp change is via our ¼ turn lamp holder and gear withdraws for maintenance.

Photo Electrical Cell

The fitting accepts all manufacturers Miniature Photo Electrical Cells as an option



Dimensions

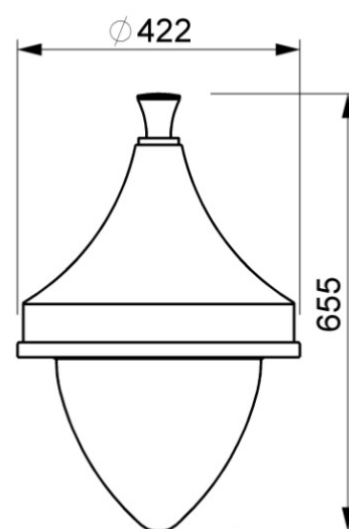

Typical Applications

- ✓ Car Parks
- ✓ Amenity
- ✓ Street / Highway
- ✓ Exterior
- ✓ House Builders